

SCOPE

ARKOSLIGHT®



								W	K	mA	Lm	%Eff
SCOPE 21	A261-10-01-	WW	WG	WR	NN	NG		8W	3000K	200	680	93%
	A261-10-02-	WW	WG	WR	NN	NG		8W	4000K	200	725	93%
SCOPE 27	A261-20-01-	WW	WG	WR	NN	NG		8W	3000K	200	680	93%
	A261-20-02-	WW	WG	WR	NN	NG		8W	4000K	200	725	93%
SCOPE 35	A261-30-01-	WW	WG	WR	NN	NG		8W	3000K	200	680	93%
	A261-30-02-	WW	WG	WR	NN	NG		8W	4000K	200	725	93%

50/60 Hz

CRI>80

PHASE CUT *


INCL. | ELEC

>39000

2 m

FAST

49°

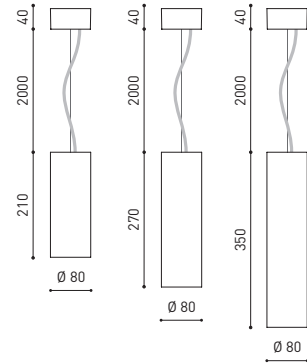

NN | *Eff:-5% | OTHER COLOURS PLEASE CONSULT | L70B50 (7K)

COLOUR | WW | WG | WR | NN | NG

MATERIAL | AL | PC

1,1 Kg [21]
1,2 Kg [27]
1,4 Kg [35]

48x12x10,5 mm



SCOPE 21

LED 49° 8 W		3000 K				4000 K			
C90 - 270		h	d	E _{med}	E _{max}	h	d	E _{med}	E _{max}
		(m)	(m)	(lux)	(lux)	(m)	(m)	(lux)	(lux)
	CIE η L: 0.93 91-96-99-100-93 DIN A60 UTE 0.91 A CIBSE BZ 1 η = 93%	1	0.92	571	905	1	0.92	609	965
		2	1.84	142	226	2	1.84	152	241
		3	2.76	63	100	3	2.76	67	107
		4	3.69	35	56	4	3.69	38	60

SCOPE 27

LED 49° 8 W		3000 K				4000 K			
C90 - 270		h	d	E _{med}	E _{max}	h	d	E _{med}	E _{max}
		(m)	(m)	(lux)	(lux)	(m)	(m)	(lux)	(lux)
	CIE η L: 0.93 91-96-99-100-93 DIN A60 UTE 0.91 A CIBSE BZ 1 η = 93%	1	0.92	571	905	1	0.92	609	965
		2	1.84	142	226	2	1.84	152	241
		3	2.76	63	100	3	2.76	67	107
		4	3.69	35	56	4	3.69	38	60


SCOPE 35

LED 49° 8 W		3000 K				4000 K			
C90 - 270		h	d	E _{med}	E _{max}	h	d	E _{med}	E _{max}
		(m)	(m)	(lux)	(lux)	(m)	(m)	(lux)	(lux)
	CIE η L: 0.93 91-96-99-100-93 DIN A60 UTE 0.91 A CIBSE BZ 1 η = 93%	1	0.92	571	905	1	0.92	609	965
		2	1.84	142	226	2	1.84	152	241
		3	2.76	63	100	3	2.76	67	107
		4	3.69	35	56	4	3.69	38	60

NN | *Eff:-5% | OTHER COLOURS PLEASE CONSULT | ⌚ L70B50 (7K)



								W	K	mA	UGR	Lm	%Eff
SCOPE 21 Surface	A260-10-01-	WW	WG	WR	NN	NG		8W	3000K	200	13,9	680	93%
	A260-10-02-	WW	WG	WR	NN	NG		8W	4000K	200	14,1	725	93%
SCOPE 27 Surface	A260-20-01-	WW	WG	WR	NN	NG		8W	3000K	200	13,9	680	93%
	A260-20-02-	WW	WG	WR	NN	NG		8W	4000K	200	14,1	725	93%
SCOPE 35 Surface	A260-30-01-	WW	WG	WR	NN	NG		8W	3000K	200	13,9	680	93%
	A260-30-02-	WW	WG	WR	NN	NG		8W	4000K	200	14,1	725	93%

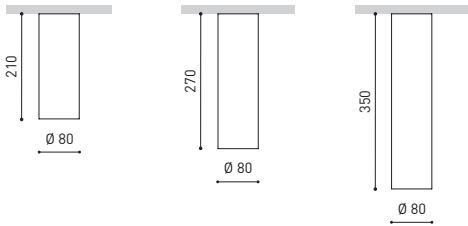

NN | *Eff:-5% | OTHER COLOURS PLEASE CONSULT | L70B50 (7K)

COLOUR WW WG WR NN NG	MATERIAL AL PC	0,75 Kg [21]	34x12x10,5 mm
		0,85 Kg [27] 1,05 Kg [35]	34x12x10,5 mm 48x12x10,5 mm



SCOPE 21

LED 49° | 8 W

C90 - 270	3000 K				4000 K			
	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)
 CIE η L: 0.93 91-96-99-100-93 DIN A60 UTE 0.91 A CIBSE BZ 1 η = 93%	1	0.92	571	905	1	0.92	609	965
	2	1.84	142	226	2	1.84	152	241
	3	2.76	63	100	3	2.76	67	107
	4	3.69	35	56	4	3.69	38	60

SCOPE 27

LED 49° | 8 W

C90 - 270	3000 K				4000 K			
	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)
 CIE η L: 0.93 91-96-99-100-93 DIN A60 UTE 0.91 A CIBSE BZ 1 η = 93%	1	0.92	571	905	1	0.92	609	965
	2	1.84	142	226	2	1.84	152	241
	3	2.76	63	100	3	2.76	67	107
	4	3.69	35	56	4	3.69	38	60

SCOPE 35

LED 49° | 8 W

C90 - 270	3000 K				4000 K			
	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)
 CIE η L: 0.93 91-96-99-100-93 DIN A60 UTE 0.91 A CIBSE BZ 1 η = 93%	1	0.92	571	905	1	0.92	609	965
	2	1.84	142	226	2	1.84	152	241
	3	2.76	63	100	3	2.76	67	107
	4	3.69	35	56	4	3.69	38	60

NN | *Eff:-5% | OTHER COLOURS PLEASE CONSULT | L70B50 (7K)

COLOUR | WW | WG | WR | NN | NG

MATERIAL | AL | PC

0,75 Kg [21]
0,85 Kg [27]
1,05 Kg [35]
 34x12x10,5 mm
34x12x10,5 mm
48x12x10,5 mm